




Addastone Resin Bonded Surfacing

Surface course requirements only

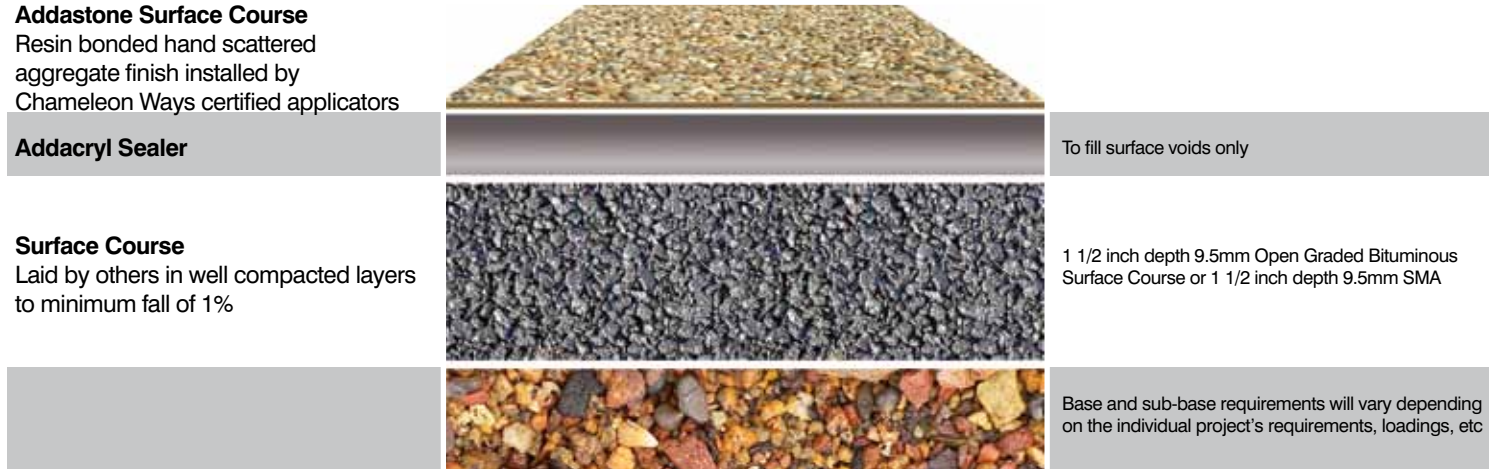

Newly laid bituminous surfaces are able to be treated 90 days or longer after installation to be sure all volatiles have dissipated from the surface. Newly placed concrete surfaces are able to be treated upon complete cure of concrete approximately 30-90 days after placement.

If areas need to be installed sooner please consult with your approved Addastone installer.



Concrete slab thickness shall be determined by the engineer based on expected load capacities. Concrete must have a coarse broom finished surface to provide texture.

Allow a minimum of 28 days to cure before applying Addastone. Refer to Addastone data sheet for surface preparation information.



NOTE: A suitable steel, wood, brick, stone or aluminium edging should be provided to ensure a neat edge detail.

Any advice, recommendation or information given by Chameleon Ways, Inc is based on practical experience and is believed to be accurate at the time of publication, no liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its employees, or applicators.

It is recommended that a certified professional engineer design and develop the proper base structure requirements to support the expected loads and taking into account the climate and site specific conditions which may exist.